


# **PACKAGING TAPE PRODUCTS CATALOGUE**

English Version

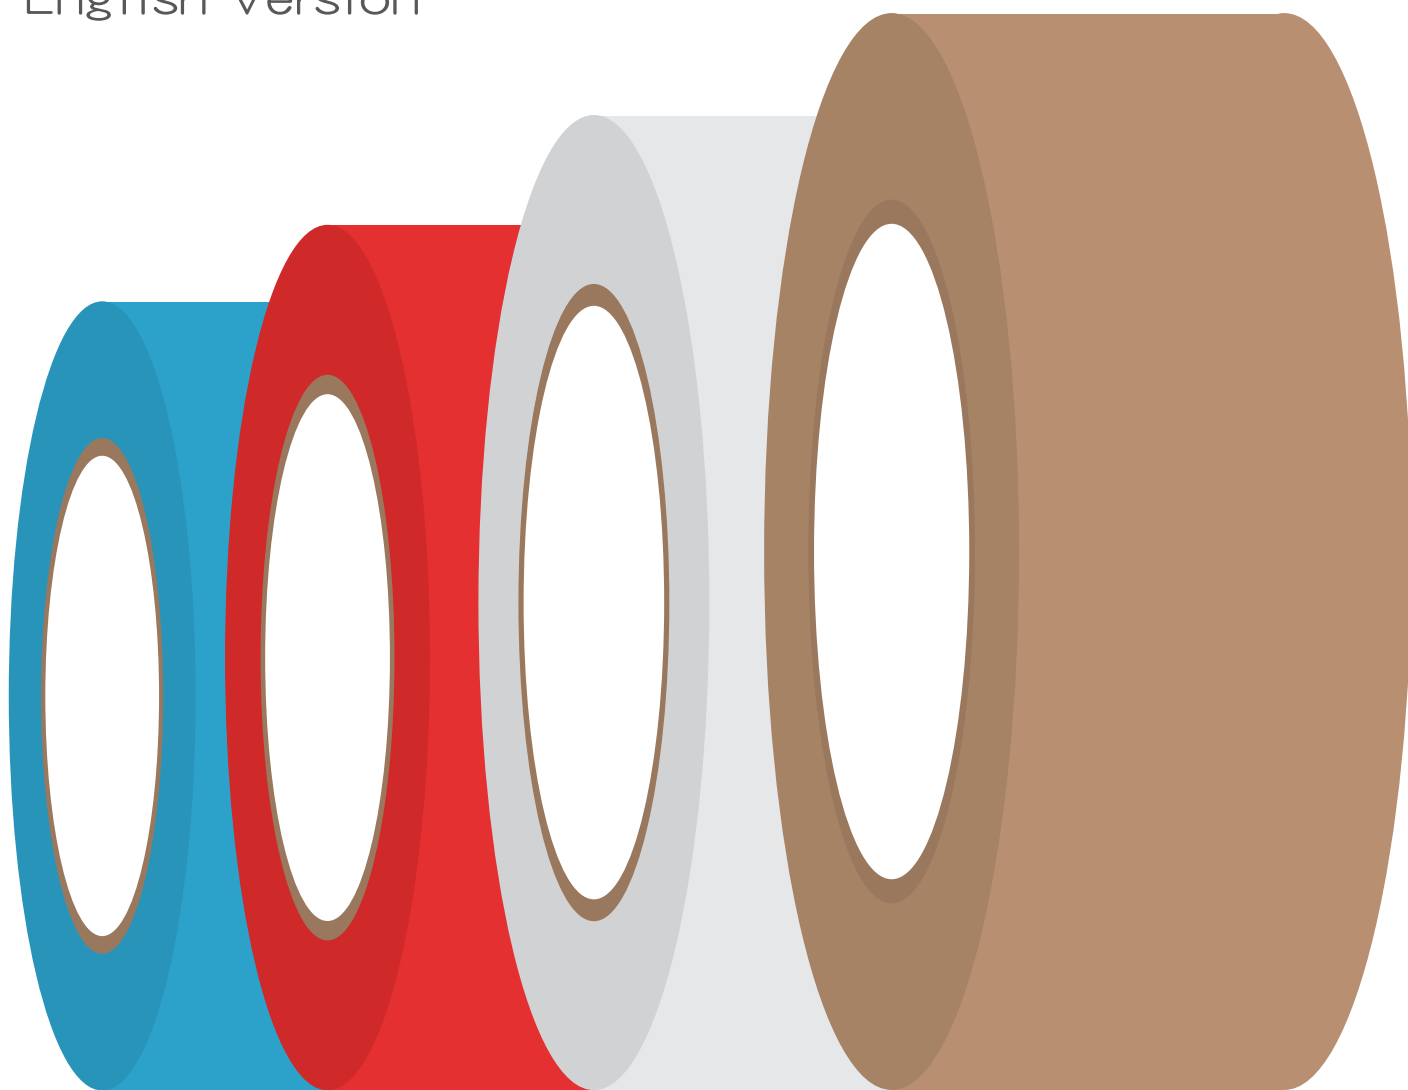

# Environmental Planning for Packaging Tape

Sekisui Chemical has been carrying out a variety of environmental protection activities such as zero emission (zero discharge), construction of an environment management system (acquired the ISO14001 Certification), and development of environmentally-considerate new products with the aim of creating an environment-oriented [Environmentally Creative Company]. In March 2000, the packaging tape production at Musashi Plant achieved zero emission (recycling of 100% discharge) and in 2002, it introduced an environmentally-considerate kraft tape production line which totally eliminated the use of any organic solvents from rear processing to adhesive protective processing. In 2003, it became the first in the industry to start production of cloth tape using 100% recycled PET fiber. We will continue to set higher aims and carry out environmentally considerate operations that meet our users' needs while reducing the burden on the environment.

## Environmentally-Friendly Products



**Eco Mark Certification**  
No. 05114024  
\* Ecora Pack Kraft Tape No.501



**Green mark**  
Recycled paper is used for the paper core.



**Green procurement network**  
It is a network with moderate ties for corporations, administration and consumers established in 1996 for the efforts to promote the green procurement. Sekisui Chemical also joins it to work on the development of environmentally-friendly products.  
- Publication of applicable products in the GNP database for the green procurement.  
- Publication of applicable products in the specific procurement goods information provision system of the Law Conforming the Promotion of Procurement of Eco-Friendly Goods and Services by the State and Other Entities.  
<http://www.gnp.jp>

**Eco mark**  
The standard for kraft tape is to meet the requirements that the recycled paper component ratio is 40% or more for the base material and 100% for the paper core. Also, any organic solvent is not used at the adhesive application process.  
<Object product>  
Ecora Pack Kraft Tape No.501


**Conforming products to the Law Conforming the Promotion of Procurement of Eco-Friendly Goods and Services by the State and Other Entities**  
Requirement for kraft tape is the recycled paper component ratio of 40% or more for the base material, and that for cloth tape is the recycled PET fiber component ratio of 40% or more for it.

**Green mark**  
Only products, of which raw material has a component ratio of used paper of 40% or more in principle and certified by Paper Recycling Promotion Center, are allowed to indicate it.

**Green procurement network**  
It is a network with moderate ties for corporations, administration and consumers established in 1996 for the efforts to promote the green procurement. Sekisui Chemical also joins it to work on the development of environmentally-friendly products.  
- Publication of applicable products in the GNP database for the green procurement.  
- Publication of applicable products in the specific procurement goods information provision system of the Law Conforming the Promotion of Procurement of Eco-Friendly Goods and Services by the State and Other Entities.  
<http://www.gnp.jp>


**■ Cellophane tape No. 252**


Natural cellulose for the tape base material and natural rubber for the adhesive are used respectively.





## Products purchased under the Green Procurement System

- Ecora Pack Kraft Tape No. 501**


- Ecora Cloth Tape No. 701**


- Fit Light Tape No. 738**


- Cloth Series New Clear Cloth Tape**



**■ Recycled PET Fiber used Cloth Tape No. 601s**



## Non-solvent type adhesive tape products



**■ Kraft Tape No. 500**



**■ White Kraft Tape No. 500W**



**■ Super Kraft Tape No. 504NS**



**■ Evercel OPP Tape**



**■ Sekisui OPP Tape E**



**■ White Super Kraft Tape No. 504WNS**

## Guide Marks

The following functions are shown in order to make choosing a suitable tape easier. Please use them as a reference when choosing your tape and considering your packaged products' weight, shape, packaging production environment, delivery environment, etc.

**Light packaging**

Suitable for sealing single packs (or container openings), and other general packaging. Good for sealing cans, bundling food products, etc.

**Medium and light packaging**

Suitable for packaging lighter and medium-weight packages, such as small tools.

**Medium and heavy packaging**

Mainly suitable for the delivery of medium and heavy weight packaging in severe conditions.

**Heavy packaging**

Suitable for relatively heavy products, contents whose rebound is strong, and in cases where strong adhesive strength is needed.

**Printable**

For printing the company name, product name and identification.

**Color tape available**

For improving the images of products or classifying products.

**Longer tape available**

For machine sealing.

**Sealing**

Suitable for can sealing and elongation.

**Tear-able by hand**

Can tear it cleanly by hand, without the use of an exclusive cutter.

**Special cutter**

A special cutter is needed.

**Non-slip**

Non-slippery tape for stacking packages.

**Writable**

For writing letters and marks using an oil marker.

**Stackable**

No loss of sealing power, even when over-lapping each other.

**Quiet**

Silent unwinding sound for a comfortable working condition.

**Bundling**

Suitable for bundling work because of its adhesive and its hand tear-able feature.

**Temporary fixing**

Suitable for temporary attaching of products.

**Decorating**

Used for high grade decorating.

**Low temperature**

No performance deterioration in a low-temperature environment.

**Water resistant**

Suitable for protection from lots of water drops in the delivery environment.

**Environment**

Recycled material or solvent-free adhesive agent being used.

**Protection from static electricity**

Suitable for packaging precise parts; static electricity does not occur.

## ▼Contents

Color Variation ..... P 4

**■ Kraft series**

Kraft tape No. 500 ..... P 5

White kraft tape No. 500 W ..... P 5

Color kraft tape No. 500 WC ..... P 6

Super kraft tape No. 504 NS ..... P 6

White super kraft tape No. 504 WNS ..... P 7

Ecora pack kraft tape No.501 ..... P 7

**■ OPP series**

Evercel OPP tape No.820NEV No.835NEV No.830NEV ..... P 8

Sekisui OPP tapeE No.882 No.884 No.886 ..... P 9

Evercel OPP tape No.820C colored ..... P 10

OPP tape cutter ..... P 10

Orien tape No.830 ..... P 11

Tough light tape No.835 ..... P 11

Orien spatt tape No.830S ..... P 12

**■ Cloth series**

Vinyl cloth tape No.750 ..... P 13

New cloth tape No.760 ..... P 13

Ecora cloth No. 701 ..... P 14

Clear cloth tape No.781 ..... P 14

New clear cloth tape No.784 ..... P 15

Cloth tape No.600 ..... P 16

Cloth tape No.600V ..... P 16

Cloth tape No.600V colored ..... P 17

Cloth tape No.600S ..... P 17

Recycled PET Fiber used Cloth Tape No. 601S ..... P 18

**■ Light packaging**

Vegetable bundling tape No. 808 ..... P 19

Fit Light Tape No. 738 ..... P 19

Cellophane tape No.252 ..... P 20

Cellophane tape for printing ..... P 20

Sekisui colored cellophane tape ..... P 21

Cutlon tape No.810 ..... P 21

Tape cutter PC1 ..... P 21

Paper masking tape No.652 ..... P 22

Bag sealer tape H type ..... P 22

Bag sealer tape C type ..... P 23

Shine tape No.25 ..... P 24

Fixlon tape No.816 ..... P 24

Method of choosing Tape ..... P 25

Tape capacity indicators ..... P 25

**■ Printing Tape**

Key points of order for printing tape ..... P 26



Musashi Plant acquired the ISO9001 certification for all business processes from production to distribution




武蔵工場：1999年12月  
認定番号：JQA-QM4155

ISO9001 is a quality management system which certifies that a company is able to provide consistently high quality products and services through clearly laid out production conditions, work procedures, etc. for all business processes from receiving orders to shipment. With cooperation from relevant distribution departments, the Sekisui Musashi Plant has acquired this certification for not only the production lines but all its other business processes as well.


Latest Non-solvent Kraft Production Line - environmentally-considerate yet high quality production made possible

At the Musashi Plant, we have created a whole production process which does not use any organic solvent, complying with the spirit of the PRTR Law (Pollutant Release and Transfer Register Law) enacted to reduce the burden on the environment, thus making it possible to eliminate the removing and adhesive solvents for the Kraft tape.

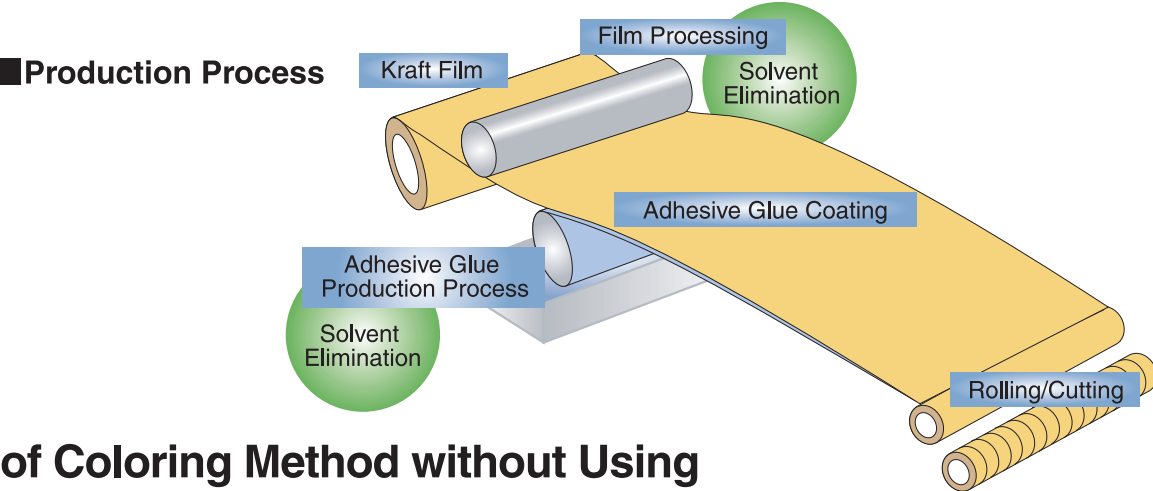

Introduction of Coloring Method without Using Organic Solvents

In the past, the coloring agents for Cloth Tape No. 600V Colored and New Cloth Tape No. 760Beta were dissolved in organic solvents and printed on the polyethylene base materials. Under the current coloring method, the coloring agents are added to the polyethylene which is then laminated, thus no organic solvent is used.

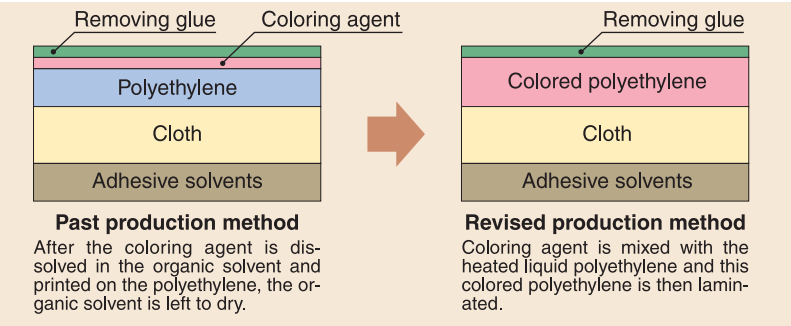

Cloth Tape No.600V Colored




New Cloth Tape No.760Beta

Color Variation

■Tapes' colors vary by base material.  
●Colors of the tapes are influenced by those of their base materials.  
Kraft Tape series and Cloth Tape series produce relatively subdued colors and OPP Tape series produces relatively bright colors.  
Though using the same base material, cardboard-colored tapes and white-colored ones have different color tones.


Kraft tape No.500 Colored

Base color	Cardbord color
Color Variation	Yellow・Green・Blue・Red・White・Black Sky・Brown・Pink・Purple・Grass green
Size Variation	38・50mm X 50・500m

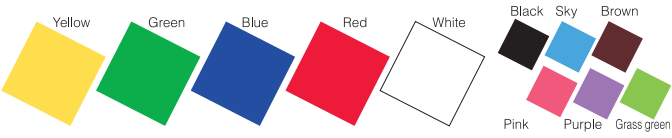


Color Kraft tape No.500WC

Base color	White
Color Variation	Yellow・Green・Blue・Red・White・Orange Yellow green・Sky・Pink・Purple
Size Variation	38・50mm X 50m

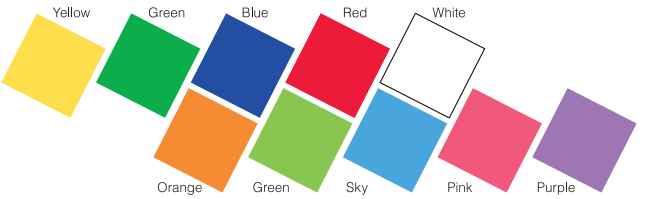


Evercel OPP tape No.820NC Colored

Base color	Transparent
Color Variation	Yellow・Green・Blue・Red・White
Size Variation	36・48mm X 100m 36・48mm X 1000m




Orien tape No.830 Colored

Base color	Transparent
Color Variation	Yellow・Green・Blue・Red・White・Black
Size Variation	50mm X 50m




Tough Light tape No.835 Colored

Base color	Transparent
Color Variation	Yellow・Green・Blue・Red・White・Black
Size Variation	50mm X 100m 50mm X 1000m ※5C/S～B.T.O.




New Cloth tape No.760 Colored

Base color	Brown
Color Variation	Yellow・Green・Blue・Red・White
Size Variation	50mm X 50m




Cloth tape No.600 Colored

Base color	Brown
Color Variation	Yellow・Green・Blue・Red・White・Black・Silver
Size Variation	50mm X 25m




Cloth tape No.600V Colored

Base color	Brown
Color Variation	Yellow・Green・Blue・Red・White・Silver・Pink・Black
Size Variation	50mm X 25m




Cellophane tape No.252 Colored

Base color	Transparent
Color Variation	Yellow・Green・Blue・Red・White・Black
Size Variation	12・15・18・24mm X 35m




Bag Sealer tape H type

Color Variation	Yellow・Green・Blue・Red・White・Orange・Purple・Sky
Size Variation	9mm X 50m



Bag Sealer tape C type

Color Variation	Yellow・Green・Blue・Red・White・Nut brown・Brown
Size Variation	9mm X 35m



※Note that the tapes' colors shown in this catalog may be different from the actual ones.  
Please place an order after checking the actual colors in the color chart or the tape samples.

# Kraft Tape No. 500



**Excellent holding power and stable quality. Light unwinding force enables excellent workability.**

The most frequently used, general purpose tape for packaging cardboard boxes. A special resin treatment makes it highly moisture-proof and gives it excellent durability against high and low temperatures.

- Usage
- Sealing cardboard boxes (medium and light weight)

Performance		
Test items	Unit	No. 500
Thickness of tape	mm	0.140
Thickness of base material	mm	0.110
Adhesive strength	N/10mm (g/10mm)	3.3 (337)
Tack	Ball No.	12
Unwinding force	N/10mm (g/10mm)	0.60 (61.2)
Holding power	mm	0
Tensile strength	N/10mm (Kg/10mm)	60 (6.12)
Elongation	%	8.0

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25×50	10	100
38×50	6	60
50×50	5	50
60×50	4	40
75×50	3	30
38×500	—	6
50×500	—	5
60×500	—	4

Base color	
Color of cardboard box	
Colored	
Yellow, green, blue, red and white	

\* Color tape in sizes other than 38×50, 50×50, 38×500 and 50×500 will be custom-made.

\* Black, light blue, brown, pink, purple and light green are available as semi-standard colors. Semi-standard color tape will be custom-made.

\* Please feel free to contact us about other sizes.

Medium and light packaging

Printable

Color tape available

Longer tape available

Special cutter

Quiet

Environment

Protection from static electricity

# White Kraft Tape No. 500W



**White-color kraft tape**

While maintaining the same qualities as those of conventional kraft tape, this white tape will not spoil stylishly designed packages. This tape is ideal, for instance, for food packages with clean images or cosmetics' packages with a sophisticated feeling.

- Usage
- Stylish packages such as cosmetics' packages
  - Decoration

Performance		
Test items	Unit	No. 500W
Thickness of tape	mm	0.140
Thickness of base material	mm	0.110
Adhesive strength	N/10mm (g/10mm)	3.3 (337)
Tack	Ball No.	12
Unwinding force	N/10mm (g/10mm)	0.60 (61.2)
Holding power	mm	0
Tensile strength	N/10mm (Kg/10mm)	60 (6.12)
Elongation	%	8.0
Weathering resistance	—	○
Discoloration resistance	—	○

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25×50	10	100
38×50	6	60
50×50	5	50
60×50	4	40
75×50	3	30
38×500	—	6
50×500	—	5

Base color	
White	

\* Please feel free to contact us about other sizes.

Medium and light packaging

Printable

Longer tape available

Special cutter

Quiet

Environment

Protection from static electricity

# Color Kraft Tape No. 500WC



**Choice of 10 colors for the improvement of product images and the identification of contents.**

Ten vivid colors were developed using special white kraft paper. This new type of tape is made to meet the demands of increasing identification and imaging importance.

- Usage
- Identifying contents
  - When product image is important

Performance		
Test items	Unit	No.500WC
Thickness of tape	mm	0.140
Thickness of base material	mm	0.111
Adhesive strength	N/10mm (g/10mm)	3.3 (337)
Tack	Ball No.	12
Unwinding force	N/10mm (g/10mm)	0.60 (61.2)
Holding power	mm	0
Tensile strength	N/10mm (Kg/10mm)	60 (6.12)
Elongation	%	8.0

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
38×50	1	60
50×50	1	50

Colored	
Red, blue, yellow, green, white, orange, yellowish green, light blue, pink and purple	

Medium and light packaging

Color tape available

Special cutter

Quiet

Environment

Protection from static electricity

# Super Kraft Tape No. 504NS



**High quality, functional, non-slip tape which prevents packages from becoming unbalanced.**

In addition to the unique usability and handiness of kraft tape, this tape has three additional functions: non-slip, stackable and writable. This enhances comfort and efficiency in all kinds of work.

- Usage
- Piling up packages
  - Light packages of foods, sweets and household goods
  - Packages where the contents need to be identified and checked
  - Parcels

Performance		
Test items	Unit	No. 504NS
Thickness of tape	mm	0.140
Thickness of base material	mm	0.110
Adhesive strength	N/10mm (g/10mm)	3.3 (337)
Tack	Ball No.	12
Unwinding force	N/10mm (g/10mm)	0.40 (40.8)
Holding power	mm	0
Tensile strength	N/10mm (Kg/10mm)	60 (6.12)
Elongation	%	8.0
Non-slip	—	◎
Stackability	—	◎
Writability (oil ink)	—	◎
Practically	Low temperature	◎
	Room temperature	◎
	High temperature	◎

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25×50	1	100
38×50	1	60
50×50	1	50
60×50	1	40
75×50	1	30
38×500	—	6
50×500	—	5
60×500	—	4

Base color	
Color of cardboard box	
Protection from static electricity	

\* Please feel free to contact us about other sizes.

Medium and light packaging

Printable

Longer tape available

Specia cutter

Non-slip

Writable

Stackable

Environment



# White Super Kraft Tape No. 504WNS



## Non-slippery super white kraft tape.

It has the functions of 504NS.  
In addition, it provides package stability, stackability, and writability.

### Usage

- Piling up packages
- Parcels
- Light packages of foods, sweets and household goods
- Packages where the contents need to be identified and checked

Performance		
Test items	Unit	No. 504WNS
Thickness of tape	mm	0.140
Thickness of base material	mm	0.110
Adhesive strength	N/10mm (g/10mm)	3.3 (337)
Tack	Ball No.	12
Unwinding force	N/10mm (g/10mm)	0.40 (40.8)
Holding power	mm	0
Tensile strength	N/10mm (K g/10mm)	60 (6.12)
Elongation	%	8.0
Non-slip	—	○
Stackability	—	○
Writability (oil ink)	—	○

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
38×50	1	60
50×50	1	50
38×500	—	6
50×500	—	5

Base color
White

\* Please feel free to contact us about printing.

Medium and light packaging	Printable	Longer tape available	Special cutter	Non-slip	Writability
	Stackable	Environment	Protection from static electricity		

# Ecora Pack Kraft Tape No. 501



## Japan's first kraft tape with a recycled paper component of more than 40%.

More than 40% of the base material is recycled paper, yet it maintains the same performance, appearance and quality as conventional kraft tape. This high-standard ecological tape responds to today's environmental trends, while allowing you to imagine that recycled paper is not used.

### Usage

- Government offices, public organizations or companies involved in environmental issues
- For sale at stores as ecological products

Performance		
Test items	Unit	No. 501
Thickness of tape	mm	0.140
Thickness of base material	mm	0.110
Adhesive strength	N/10mm (g/10mm)	3.3 (337)
Tack	Ball No.	12
Unwinding force	N/10mm (g/10mm)	0.40 (40.8)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	60 (6.12)
Elongation	%	7.0

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
50×50	1	50

Base color
Color of cardboard box

Medium and light packaging	Special cutter	Protection from static electricity	Quiet	Environment
----------------------------	----------------	------------------------------------	-------	-------------

# Evercel-OPP Tape No. 820NEV No. 835NEV No. 830NEV



This is high cost performance tape from China.  
It has superior strength, water-resistance, and adhesion. In addition, It comes in many widths to meet your needs.

### Usage

- Packaging cardboard boxes with automatic sealing machines
- Packaging for export

Performance				
Test items	Unit	No. 820NEV	No. 835NEV	No. 830NEV
Thickness of tape	mm	0.052	0.062	0.09
Adhesive strength	N/10mm(g/10mm)	2.8(285.6)	2.9(295.8)	3(306.0)
Tack	Ball No.	17	17	17
Unwinding force	N/10mm(g/10mm)	0.75(76.5)	0.71(72.4)	0.75(76.5)
Tensile strength	N/10mm(kg/10mm)	44.2(4.5)	47.5(4.85)	72.9(7.44)
Elongation	%	150	160	180

\*The figures in the table above are measurements and are of guaranteed values.

### No.820NEV

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25x100	10	100
38x100	6	60
50x100	5	50
60x100	4	40
75x100	3	30
38x1000	/	6
50x1000	/	5
60x1000	/	4
75x1000	/	3

### No.835NEV

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25x100	10	100
38x100	6	60
50x100	5	50
60x100	4	40
75x100	3	30
38x1000	/	6
50x1000	/	5
60x1000	/	4
75x1000	/	3

### No.830NEV

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25x50	10	100
38x50	6	60
50x50	5	50
60x50	4	40
75x50	3	30
50x500	/	5
38x1000	/	6
50x1000	/	5
60x1000	/	4
75x1000	/	3

38x1000 is transparent only

Medium and heavy packaging (830NEV-835NEV)
---


Medium and light packaging (820NEV)
--

Longer tape available	Stackable
Special cutter	Environment
Writability	Protection from static electricity

Base colors
Clear and brown

# Sekisui OPP Tape E

No. 882 No. 884 No. 886

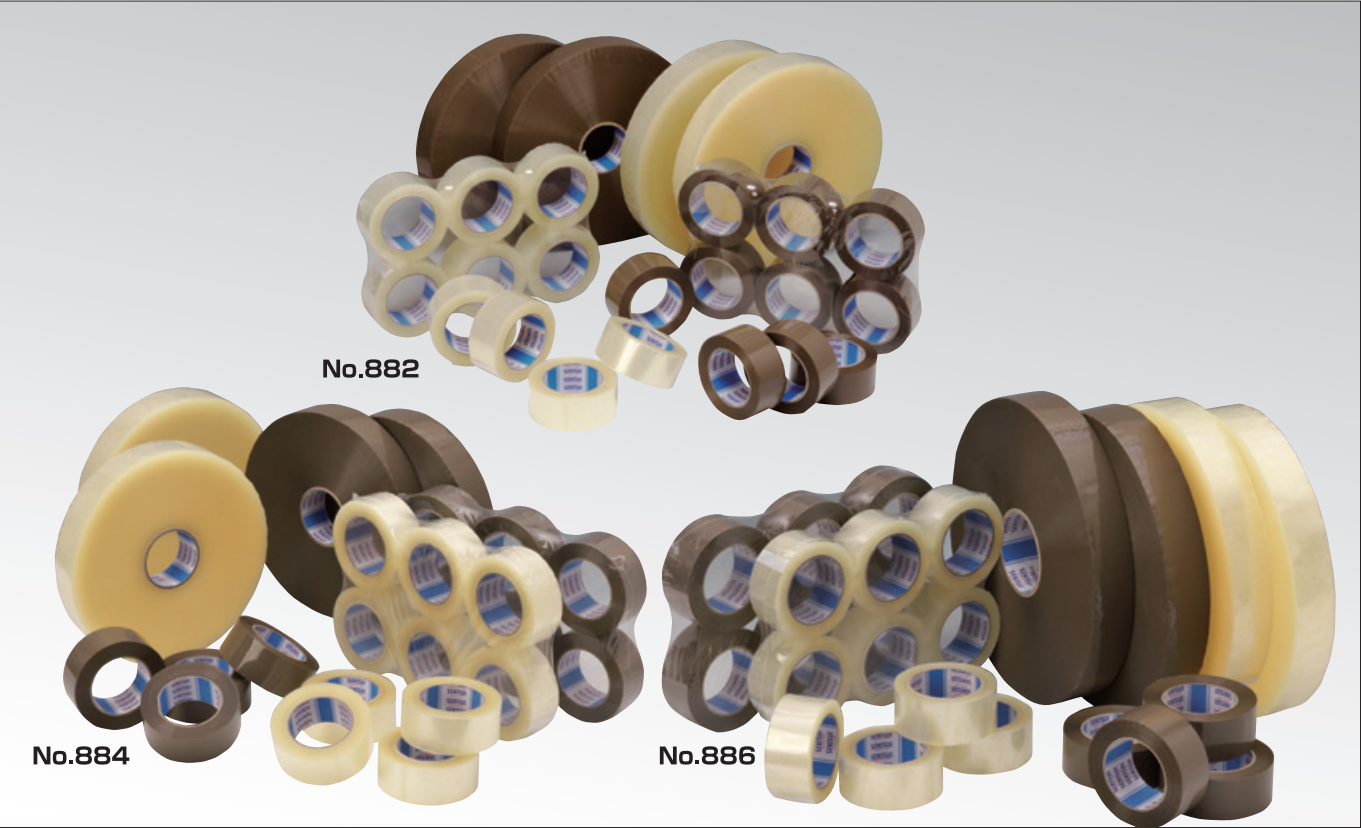

## Low Cost High Quality OPP Tape

OPP Tape with Superior Strength and Adhesion Power for Packaging  
This tape is also available in thick types for heavy packages (No. 884: 62 Micron, No. 886: 90 Micron), and long types (No. 882: 1,500 m, No. 884, 886: 1,000 m).  
No solvent is used in the manufacturing process (environmentally-friendly product).

- Usage
- Packaging cardboard boxes with automatic sealing machines
  - Packaging for export

Performance				
Test items	Unit	No. 882	No. 884	No. 886
Thickness of tape	mm	0.052	0.062	0.090
Adhesive strength	N/10mm (g/10mm)	2.7 (275.4)	2.8 (285.6)	2.9 (295.8)
Tack	Ball No.	17	17	17
Unwinding force	N/10mm (g/10mm)	0.56 (57.1)	0.68 (69.4)	0.76 (77.6)
Tensile strength	N/10mm (K g/10mm)	50.0 (5.1)	56 (5.7)	75 (7.7)
Elongation	%	121	160	185

\*The figures in the table above are measurements and are not guaranteed values.

### No.882

Specifications			
Size W (mm)× L (m)	Base colors	Unit packaging (rolls)	One package (rolls)
36×100	Clear	6	48
36×100	brown		
48×100	Clear		36
48×100	brown		
36×1,500	Clear	1	6
36×1,500	brown		
48×1,500	Clear		5
48×1,500	brown		

### No.884

Specifications			
Size W (mm)× L (m)	Base colors	Unit packaging (rolls)	One package (rolls)
48×100	Clear	6	36
48×100	brown		
48×1,000	Clear	1	5
48×1,000	brown		

### No.886

Specifications			
Size W (mm)× L (m)	Base colors	Unit packaging (rolls)	One package (rolls)
48×50	Clear	6	36
48×50	brown		
48×1,000	Clear	1	4
48×1,000	brown		

Medium and light packaging

Longer tape available

Stackable

Special cutter

Environment

Writable

Protection from static electricity

# Evercel OPP Tape

No. 820NC Colored



## We have developed a color version of Evercel OPP tape.

Its Functions and qualities are the same as those of Evercel OPP tape No.820NEV. We have 5 color options.  
For packages where image is important, We have tape to meet your divers, distinguished needs.

- Usage
- Packaging cardboard boxes with automatic sealing machines
  - Packaging for export

Performance		
Test items	Unit	No.820C
Thickness of tape	mm	0.05
Adhesive strength	N/10mm(g/10mm)	3.3(340.1)
Tack	Ball No.	15
Unwinding force	N/10mm(g/10mm)	0.75(76.5)
Tensile strength	N/10mm(kg/10mm)	44.2(4.5)
Elongation	%	166

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Colored
Size W (mm)× L (m)	Unit packaging (rolls)	One package (rolls)	
36×100	6	48	Yellow・Green・Blue・Red・White
48×100	6	36	Yellow・Green・Blue・Red・White
38×1,000	—	8	Yellow・Green・Blue・Red・White
48×1,000	—	6	Yellow・Green・Blue・Red・White

Medium and light packaging

Special cutter

Stackable

Environment



Protection from static electricity

Color tape available

Writable

OPP Tape Cutter  
**Sekisui Helper T Type**  
OPP Tape Cutter  
**Sekisui Helper P Type**  
Exclusive machine for preventing the curling of standard base material tape.

Specifications
W
50mm/60mm/70mm
Unit packaging
1
One package
10





# Orien Tape No. 830



### Good for its superior, holding strength.

Sekisui is proud of this heavy packaging tape with its polypropylene film base, and its high, stable quality. It makes packaging heavy items and bundling work easy.

- Usage
- Sealing cardboard boxes (medium - heavy weight)

Performance		
Test items	Unit	No.830
Thickness of tape	mm	0.090
Thickness of base material	mm	0.060
Adhesive strength	N/10mm (g/10mm)	2.40 (245)
Tack	Ball No.	16
Unwinding force	N/10mm (g/10mm)	1.20 (122)
Holding power	mm	0.2
Tensile strength	N/10mm (K g/10mm)	73.0 (7.45)
Elongation	%	150

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base colors
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
25×50	10	100	Clear, brown
38×50	6	60	
50×50	5	50	Colored Yellow, green, blue, red, white, and black
60×50	4	40	
75×50	3	30	*Please feel free to consult us about printing tape and color matters.
38×500	—	8	
50×500	—	6	*50X50 is the standard size of color tape.
60×500	—	5	

\* Please feel free to contact us about other sizes.

Medium and heavy packaging	Printable	Color tape available	Longer tape available	Special cutter	Bundling
	Low temperature	Stackable	Water resistant	Writable	

# Tough Light Tape No. 835



### Good and lightweight.

It has superior adhesive strength. Made from a rubber adhesive on a polypropylene base film, it has a wide range of uses, from heavy to light weight packaging. In addition, it works for packaging products where guarding against humidity and water is important.

- Usage
- Sealing cardboard boxes (medium - heavy weight)

Performance		
Test items	Unit	No. 835
Thickness of tape	mm	0.062
Thickness of base material	mm	0.040
Adhesive strength	N/10mm (g/10mm)	2.36 (241)
Tack	Ball No.	16
Unwinding force	N/10mm (g/10mm)	1.10 (112)
Holding power	mm	0.2
Tensile strength	N/10mm (K g/10mm)	58 (5.96)
Elongation	%	150

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base colors
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
25×100	1	100	Clear, brown
38×100	1	60	
50×100	1	50	Colored Yellow, green, blue, red, white, and black
60×100	1	40	
75×100	1	30	*Please feel free to consult us about printing tape and color matters.
38×1000	—	6	
50×1000	—	5	*50X100 is the standard size of color tape.
60×1000	—	4	

\* Please feel free to contact us about other sizes.

Medium and heavy packaging	Printable	Color tape available	Longer tape available	Special cutter	Bundling
	Low temperature	Stackable	Water resistant	Writable	

# Orien Spatt tape No. 830S



### No cutter is needed. Packaging goes smoothly.

Because it is easy to unwind and tear, there is an increase in efficiency at work. High quality Orien tape has a special base film, and stable, adhesive strength.

- Usage
- Sealing cardboard boxes and plastic cases
  - Outer packaging for electricity, fiber, electrical products, etc.
  - Light packaging of small products for export
  - Packaging many kinds of slightly heavy products

Performance		
Test items	Unit	No. 830S
Thickness of tape	mm	0.096
Thickness of base material	mm	0.068
Adhesive strength	N/10mm (g/10mm)	2.40 (245)
Tack	Ball No.	16
Unwinding force	N/10mm (g/10mm)	1.60 (163)
Holding power	mm	0.2
Tensile strength	N/10mm (K g/10mm)	25.0 (2.55)
Elongation	%	650

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Notes
38×50	1	60	Clear only
50×50	1	50	—
75×50	1	30	Brown only

\* Please feel free to contact us about other sizes.

Base colors
Clear, brown

Medium and light packaging	Tear-able by hand	Writable	Stackable	Water resistant	Low temperature
----------------------------	-------------------	----------	-----------	-----------------	-----------------

# Vinyl-Cloth Tape

## No. 750



### Main cloth tape. Superior packaging capacity.

New fibers and special, laminated cloth are used for the base. It is strong, and its operation and packaging capacities are also a step up.

#### Usage

- Packaging cardboard boxes (heavy weight)
- Packaging heavy weight packages for export

Performance		
Test items	Unit	No. 750
Thickness of tape	mm	0.155
Thickness of base material	mm	0.100
Adhesive strength	N/10mm (g/10mm)	2,30 (235)
Tack	Ball No.	25
Unwinding force	N/10mm (g/10mm)	2,30 (235)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	69.0 (7.0)
Elongation	%	12

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
25×50	1	60	Brown
38×50	1	36	
50×50	1	30	
60×50	1	30	
75×50	1	24	
75×50	1	24	

\* Please feel free to contact us about other sizes.

Heavy packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Water resistant	Low temperature			

# New Cloth Tape

## No. 760



### Main cloth tape developed by Sekisui's high technology.

The base is made of special fibers that are strong in dampness and humidity. Even in water, the strength almost never decreases. Also, by merely applying light pressure (even against cardboard with a strong tendency to rebound), the tape sticks tightly, making many diverse uses possible.

#### Usage

- Packaging cardboard boxes (heavy weight)
- Operations where kinds need to be distinguished
- Packaging heavy weight packages for export

Performance		
Test items	Unit	No. 760
Thickness of tape	mm	0.150
Thickness of base material	mm	0.095
Adhesive strength	N/10mm (g/10mm)	2,30 (235)
Tack	Ball No.	25
Unwinding force	N/10mm (g/10mm)	2,70 (275)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	67.0 (6.8)
Elongation	%	12

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
25×50	1	60	Brown
38×50	1	36	
50×50	1	30	
60×50	1	30	
75×50	1	24	
75×50	1	24	

\* Please feel free to contact us about other sizes.

Heavy packaging	Printable	Color tape available	Tear-able by hand	Non-slip	Writable
	Stackable	Bundling	Water resistant	Low temperature	

# Ecora Cloth No. 701



### Cloth tape conforming to the Green Procurement System

Made of soft materials that allow it to be easily torn by hand, this cloth tape is easy to use and environmentally-considerate. It can be used reliably even under low temperature working conditions.

#### Usage

- Packaging cardboard boxes and Styrofoam boxes for farming products

Performance		
Test items	Unit	No. 701
Thickness of tape	mm	0.120
Thickness of base material	mm	0.080
Adhesive strength	N/10mm (g/10mm)	2,7 (275)
Tack	Ball No.	21
Unwinding force	N/10mm (g/10mm)	2,30 (235)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	35 (3,570)
Elongation	%	25

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
50×50	1	30	Brown, White

#### Green procurement system product

Medium and heavy packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Water resistant	Low temperature	Protection from static electricity		

# Clear Cloth Tape

## No. 781



### Because of its semi-transparent quality, the case design and lettering can be clearly seen.

It can be torn by hand, adding height to its excellent work, and the special cloth really protects packaged items. In addition, its excellent capacity for practical use in low temperatures allows for operations outside of cold rooms and even in low temperature warehouses.

#### Usage

- Packaging original cases
- Packaging many of the items mentioned
- Short time packaging operations
- Packaging where opening it is important

Performance		
Test items	Unit	No. 781
Thickness of tape	mm	0.145
Thickness of base material	mm	0.115
Adhesive strength	N/10mm (g/10mm)	1,70 (173)
Tack	Ball No.	19
Unwinding force	N/10mm (g/10mm)	2,0 (204)
Holding power	mm	0.2
Tensile strength	N/10mm (K g/10mm)	72.0 (7.3)
Elongation	%	16

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
50×50	1	30	Semi-clear

Medium and light packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Water resistant	Low temperature			



# New Clear Cloth Tape No. 784



## Recycled Type Using Recycled PET in Semi-Clear Cloth Tape

Because of its soft base material, it is most suitable for packaging where complete sealing is required. Also, its semi-clear quality ensures that it does not stand out. It can be relied on in a wide variety of work conditions such as low temperatures required in Cool Bin delivery. It is not only water resistant but also most suitable for Styrofoam case packaging.

### Usage

- Packaging original cases
- Packaging with numerous items to record
- Short time packaging operations
- Packaging where opening is important

Performance		
Test items	Unit	New clear cloth tape
Thickness of tape	mm	0.107
Thickness of base material	mm	0.080
Adhesive strength	N/10mm (g/10mm)	1.8 (184)
Tack	Ball No.	15
Unwinding force	N/10mm (g/10mm)	1.8 (184)
Holding power	mm	0.2
Tensile strength	N/10mm (K g/10mm)	39.6 (4.0)
Elongation	%	29

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
50×25	1	30

Base color	
Semi-Clear	

### Green procurement system product

Medium and light packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Water resistant	Low temperature	Protection from static electricity		

# Cloth Tape No. 600



## Strong adhesive strength. Long seller for heavy packaging and packaging for exporting.

A self-adhesive with superior adhesive and holding strength is used on the cloth base. This tape was first used for heavy items and exporting, but it can also be used for the protection of machines because of its thickness.

### Usage

- Sealing and packaging cardboard boxes, plastic cases, oil cans, etc.
- Protecting the surfaces of machines and instruments from rust, humidity, and scratches.
- Wrapping and packaging for export

Performance		
Test items	Unit	No. 600
Thickness of tape	mm	0.310
Thickness of base material	mm	0.200
Adhesive strength	N/10mm (g/10mm)	4.40 (449)
Tack	Ball No.	32
Unwinding force	N/10mm (g/10mm)	2.20 (225)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	60.0 (6.12)
Elongation	%	6

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25×25	1	60
38×25	1	36
50×25	1	30
60×25	1	30
75×25	1	24
100×25	1	18

Base color	
Ocher	
Colored	
Yellow, green, blue, red, white, silver, and black	

\*50X25 is the standard size of color tape.

\* Please feel free to contact us about other sizes.

Heavy packaging	Color tape available	Tear-able by hand	Non-slip	Writable	Stackable
	Bundling	Low temperature			

# Cloth Tape No. 600V



## More affordable new cloth tape in response to customers` requests

This tape is highly flexible and can be easily torn by hand, making it a tape suitable for many work purposes. To meet the needs of different usages, it is available in many specifications. It can be used from light type to heavy type packaging.

### Usage

- Sealing and packaging cardboard boxes, plastic cases, oil cans, etc.
- Heavy packaging requiring adhesive strength
- Delivery
- Packaging for moving

Performance		
Test items	Unit	No. 600V
Thickness of tape	mm	0.220
Thickness of base material	mm	0.140
Adhesive strength	N/10mm (g/10mm)	3.80 (388)
Tack	Ball No.	32
Unwinding force	N/10mm (g/10mm)	2.1 (214)
Holding power	mm	0.1
Tensile strength	N/10mm (K g/10mm)	44.0 (4.49)
Elongation	%	9.0

\* The figures in the table above are measurements and are not guaranteed values.

Specifications		
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)
25×25	1	60
38×25	1	36
50×25	1	30
60×25	1	30
75×25	1	24
100×25	1	18

Base color	
Cardboard Color	

Heavy packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
		Low temperature			

# Cloth Tape No. 600V Colored



## Colored version of Cloth Tape 600V

Available in a variety of 6 most commonly-used colors, it can be used when appearance is important or for differentiation purpose.

Usage

- Sealing and packaging cardboard boxes, plastic cases, oil cans, etc.
- Differentiating contents
- Packaging where appearance is important
- Delivery
- Packaging for moving

Performance		
Test items	Unit	No. 600V
Thickness of tape	mm	0.220
Thickness of base material	mm	0.140
Adhesive strength	N/10mm (g/10mm)	3.8 (388)
Tack	Ball No.	32
Unwinding force	N/10mm (g/10mm)	2.1 (214)
Holding power	mm	0.1
Tensile strength	N/10mm (K g/10mm)	44.0 (4,49)
Elongation	%	9.0

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Colored
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Red, Yellow, Black, White, Green, Blue, Silver, Pink
50×25	1	30	

Heavy packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Low temperature	Color tape available			

# Cloth Tape No. 600S



## Cloth tape with more cost performance.

Usage

- Mailing many computers and related products
- Home delivery service
- Moving

Performance		
Test items	Unit	No. 600S
Thickness of tape	mm	0.260
Thickness of base material	mm	0.180
Adhesive strength	N/10mm (g/10mm)	4.40 (449)
Tack	Ball No.	32
Unwinding force	N/10mm (g/10mm)	2.40 (245)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	43.0 (4,39)
Elongation	%	7

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Color of cardboard box
50×25	1	30	

Heavy packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Low temperature				

# Recycled PET Fiber used Cloth Tape No. 601S



## Environmentally-friendly tape, of which base material has a component ratio of 40% or more of recycled PET fiber

Cloth tape, for which recycled PET fiber is used as the weft and staple fiber as the warp. Considering the environment, recycled paper is used for the paper core also. The performances are equivalent to ones of cloth tape.

Usage

- Sealing and packaging cardboard cases, plastic cases, oil cans, etc.
- Heavy packaging where adhesive strength is important

Performance		
Test items	Unit	No. 601S
Thickness of tape	mm	0.215
Thickness of base material	mm	0.140
Adhesive strength	N/10mm (g/10mm)	3.90 (398)
Tack	Ball No.	32
Unwinding force	N/10mm (g/10mm)	2.0(204)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	42(4,28)
Elongation	%	6

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Cardboard Color
50×25	1	30	

Conforming products to the Law Conforming the Promotion of Procurement of Eco-Friendly Goods and Services by the State and Other Entities

Heavy packaging	Tear-able by hand	Non-slip	Writable	Stackable	Bundling
	Low temperature	Environmentally friendly			



# Vegetable bundling tape No. 808



Specifically designed for vegetable bundling, this tape provides reliable quality and superior diversity for use in product image improvement and price labeling, etc.

This is a non-polluting type tape where the glue does not stick to the vegetables. It can be securely bundled by sticking the ends together. It is a tape which is water resistant, weather resistant and strong and has conformed with the specification test conducted under the Food Products Sanitation Law.

- Usage
- Separating and bundling fresh fruit and vegetables
  - Labeling of prices

Performance		
Test Items	Unit	No. 808
Thickness of tape	mm	0.067
Thickness of base material	mm	0.04
Adhesive strength	N/10mm (g/10mm)	3.0 (306)
Self rear-adhesive strength	N/10mm (g/10mm)	1.30 (132.6)
Self-adhesive strength	N/10mm (g/10mm)	10 (1,020)
Unwinding force	N/10mm (g/10mm)	0.3 (30.6)
Tensile strength	N/10mm (kg/10mm)	45.0 (4.59)
Elongation	%	125

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
15 × 100	10	80	
20 × 100	10	80	

Base color  
Purple, Green

\* Please feel free to contact us about printing tapes.

Light packaging

Printable

Stackable

Bundling

Temporary fixing

Low temperature

Water resistant

# Fit Light Tape No. 738



Environmentally considerate tape for moving and construction curing

Uses PET products such as PET bottles and clothes as raw materials  
Segmented and recycled at the molecular level  
Uses recycled PET fiber in the base material

- Usage
- Uses recycled PET fiber in the base material of the tape.
  - More than 10% reduction in CO2 during incineration (compared to existing company products)
  - Light-weight design, compact even for 50m rolls (similar to existing company 25m rolls). Easy to carry.
  - Flexible and sticks well even on uneven surfaces.
  - Can stick on polyethylene and polypropylene laminated paper and is also stackable.
  - Easy to write on with oil-based ink.
  - Can be removed completely with special glue.

Performance		
Test Items	Unit	No. 738
Thickness of tape	mm	0.105
Adhesive strength	N/10mm (g/10mm)	2.2 (224.4)
Tack	Ball No.	16
Tensile strength	N/10mm (kg/10mm)	40 (4,080)
Elongation	%	25

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
50 × 25	1	30	
50 × 50	1	30	

Base color  
Semi-Clear,  
Blue, Green

Temporary fixing

Tear-able by hand

Water resistant

Protection from static electricity

# Cellophane Tape No. 252



Strong, longtime, top seller due to high quality.

Adhesive strength, meets low temperature needs, made from polyethylene, seals containers, transparent, easy to open shrink package....because of its many high qualities, cellophane tape No. 252 gets favorable comments, and it is Sekisui's long time seller.

- Usage
- General, light packaging
  - Wrapping and fixing paper boxes
  - Putting up calendars and posters

Performance		
Test items	Unit	No. 252
Thickness of tape	mm	0.049
Thickness of base material	mm	0.034
Adhesive strength	N/10mm (g/10mm)	3.1 (316)
Tack	Ball No.	17
Unwinding force	N/10mm (g/10mm)	1.31 (133)
Holding power	mm	0.7
Tensile strength	N/10mm (K g/10mm)	36.0 (3.67)
Elongation	%	25

\* The figures in the table above are measurements and are not guaranteed values.

Capacity / Substrate vs. Adhesive Strength : N/10mm (g/10mm)			
	0℃	23℃	40℃
Polyethylene	2.44 (249)	1.50 (153)	1.18 (120)
Polystyrene	3.54 (361)	2.71 (277)	2.48 (253)
Liner	all paper faces peeled	all paper faces peeled	paper not peeled

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	
12 × 35 · 50 · 70	10	300 (200)	
15 × 35 · 50 · 70	10	200	
18 × 35 · 50 · 70	10	200 (150)	
24 × 35 · 50 · 70	5	150	

Base color  
Clear

\*The figures in ( ) are standard lengths for 50m. and 70m.  
\*Please feel free to consult us about other sizes.

Light packaging

Printable

Color tape available

Special cutter

Writable

Stackable

Bundling

Temporary fixing

Protection from static electricity

# Cellophane Tape for Printing



Best for publicizing your company's name and products.

Please choose the design and color you like.  
Sekisui will print your company's name and product name beautifully on the tape.

- Usage
- Publicizing company's name and branch's name
  - Selling products
  - General packaging

Performance		
Test items	Unit	Cellophane Tape for Printing
Thickness of tape	mm	0.050
Thickness of base material	mm	0.034
Adhesive strength	N/10 mm (g/10 mm)	3.2 (326)
Tack	Ball No.	17
Unwinding force	N/10 mm (g/10 mm)	1.6 (163)
Holding power	mm	0.5
Tensile strength	N/10 mm (kg/10 mm)	34.0 (3.47)
Elongation	%	21

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Production lot (1 lot)
12 × 35	10	200	700 (rolls)
15 × 35	10	200	550 (rolls)
18 × 35	10	200	450 (rolls)
24 × 35	10	150 (100)	350 (rolls)

Light packaging

Bundling

Temporary fixing

Special cutter

Writable

Stackable

MAIDO Tape

Standardized tape products for sale confirmation

Specifications	
Color	Indication
Red	Thank you very much.
White	Thank you.
Yellow	ありがとうございます。(コアラ) With inscriptions of "Thank you very much" in Japanese. (Koala)

Size W (mm) × L (m)	Unit packaging (rolls)	Small, wrapped box (rolls)	One package (rolls)
15 × 25	1	10	100

\* Performs the same Cellophane Printing Tape



# Colored Cellophane Tape



**We have developed various color variations.**  
You can simultaneously identify items as shipping goods or indicate completed tasks while using the tape.

- \* Performs the same as Cellophane Printing Tape.
- Usage**
  - Identifying packaged products
  - Work confirmation
  - For light packages

Specifications		Base colors
Size W (mm) × L (m)	One package (rolls)	Yellow, green, blue, red, white, and black
12×35	200	
15×35	200	
18×35	200	
24×35	150	

\* For colors other than the standard colors, please feel free to contact us.

Light packaging

Bundling

Temporary fixing

Special cutter

Writable

Stackable

Can be used for adhesive Tape and PP Tape (OPP Tape)  
**Tape cutter PC1**

Sekisui Cellophane Tape No.252  
Sekisui Colored Cellophane Tape  
Sekisui Printing Tape's Exclusive Cutter

Specifications	
Width of tape used (mm)	
12, 15	18, 24
Length of tape used (rolls)	
Up to 70	
One package (rolls)	Unit packaging (rolls)
10	1

The following types of tape are recommended:  
Sekisui Adhesive Tape

The center of the pulley which sets the tape can be removed and used as a small roller (1-inch type).

When cutting the tape, insert the axis of the pulley as shown in the illustration.

# Cutlon Tape No. 810



**High grade packaging tape that resists discoloration and degradation.**  
It is a high grade packaging tape made from a special, polypropylene film base and a stable, expensive, self-adhesive that is resistant to heat, water, and light. It can be torn by hand, and it does not stretch, shrink, or fade after use. It is also safe to use for wrapping foodstuffs.

- Usage**
  - High grade, light packaging (medicine, cosmetics, foodstuffs)
  - General light packaging
  - Wrapping and fixing paper boxes
  - Repairing documents and books
  - Putting up calendars and posters

Performance		
Test items	Unit	No. 810
Thickness of tape	mm	0.058
Thickness of base material	mm	0.040
Adhesive strength	N/10mm (g/10mm)	3.0 (306)
Tack	Ball No.	15
Unwinding force	N/10mm (g/10mm)	0.20 (20.4)
Holding power	mm	0.0
Tensile strength	N/10mm (K g/10mm)	23.0 (2.35)
Elongation	%	160
Measurement stability	Indoors	—
	Outdoors	—
Discoloration	Indoors	—
	Outdoors	—
Water resistance	—	—
Anti-pollution	—	—

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm) × L (m)	Unit packaging (rolls)	One package (rolls)	Clear
12×50	20	200	
15×50	10	200	
18×50	10	200	

Light packaging

Writable

Stackable

Bundling

Temporary fixing

# Paper Masking Tape No. 652



**Possible to stack. Can also write on top of the tape.**  
This tape was especially developed for light packaging. In addition, it is flexible, easy to unwind and tear, and it has excellent workability.

- Usage**
  - General, light packaging
  - Sealing
  - Temporary fixing

Performance		
Test items	Unit	No. 652
Thickness of tape	mm	0.100
Thickness of base material	mm	0.060
Adhesive strength	N/10mm (g/10mm)	1.8 (184)
Tack	Ball No.	20
Unwinding force	N/10mm (g/10mm)	2.5 (255)
Tensile strength	N/10mm (K g/10mm)	40 (4.08)
Elongation	%	2.5

\* The figures in the table above are measurements and are not guaranteed values.

Specifications				Base color
Size W (mm) × L (m)	Unit packaging (rolls)	Small, wrapped box (rolls)	One case (rolls)	White
12×18	10	100	1000	
15×18	8	80	800	
18×18	7	70	700	
20×18	6	60	600	
24×18	5	50	500	
30×18	4	40	400	
36×18	3	30	300	
40×18	3	30	300	
50×18	2	20	200	

Light packaging

Non-slip

Writable

Stackable

Temporary fixing

# Bag Sealer Tape H type.



**Sealing tape with high water resistance**  
Using a special PET film, this tape has superior water resistance and is most suitable for sealing wet products such as vegetables, fresh fish and frozen foods.

- Usage**
  - Industrial usage in shops where a variety of products is handled
  - Packaging wet products
  - Packaging and differentiating simple cutlery such as paper cups

Performance		
Test Items	Unit	Bag Sealer Tape H Type
Thickness of tape	mm	0.058
Adhesive strength	N/10mm (g/10mm)	3.0 (306)
Tack	Ball No.	13
Unwinding force	N/10mm (g/10mm)	2.3 (234)
Tensile strength	N/10mm (kg/10mm)	72 (7.34)
Elongation	%	168
Water resistance	—	—
Compatibility with bag sealer	Cuttability	—
	Sealability	—

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			
Size W (mm) × L (m)	Unit packaging (rolls)	Unit packaging (rolls)	One package (rolls)
9×50	1	20	200

Base colors
Red, Yellow, Green, Blue, White, Orange, Purple, Light blue

Light packaging

Color tape available

Bundling

Water resistant



# Bag Sealer Tape C type.



**7 color variation, cellophane based, sealing tape.**  
Bag bread, cookies, vegetables, screws and many other kinds of parts and small items with Sekisui's bag sealer tape C type and our exclusive bag sealer.

- Usage
- Business of shops that deal with products with many aims
  - Packaging of products containing much moisture
  - Discrimination and packaging of paper cups and other kinds of simple tableware

Performance		
Test items	Unit	Bag Sealer Tape C Type
Thickness of tape	mm	0.050
Thickness of base material	mm	0.034
Adhesive strength	N/10 mm (g/10 mm)	3.2 (326)
Tack	Ball No.	17
Unwinding force	N/10 mm (g/10 mm)	1.6 (163)
Tensile strength	N/10 mm (kg/10 mm)	34.0 (3.47)
Elongation	%	21
Suitability for bag sealer	Cuttability	—
	Sealability	—

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			
Size W (mm)× L (m)	Unit packaging (rolls)	Small, wrapped box (rolls)	One case (rolls)
9×35	1	20	200

Base colors	Light packaging	Color tape available	Bundling
Red, Yellow, Green, Blue, White, Brown, Orange			

Bag Sealer No. 20

Quickly and simply seal by just passing your product through the opening in the slit part.  
Easy to use, compact sealer.

Specifications				
	Size	Unit packaging (rolls)	One package (rolls)	Color
No.20	W72mmXL220mmX142mm	1	10	Blue

# Shine Tape No. 25



**High performance, gorgeous tape for decorating and sealing containers.**  
Because of its aluminized, polyester base film, it releases a beautiful, metallic, brightness. It is used to decorate high performance and gorgeous products. It is also used for sealing containers.

- Usage
- Decoration
  - Sealing cans


Performance		
Test items	Unit	No. 25
Thickness of tape	mm	0.046
Thickness of base material	mm	0.025
Adhesive strength	N/10mm (g/10mm)	2.55 (260)
Tack	Ball No.	18
Unwinding force	N/10mm (g/10mm)	1.47 (150)
Tensile strength	N/10mm (K g/10mm)	61.25 (6.25)
Elongation	%	140

\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base colors
Size W (mm)× L (m)	Unit packaging (rolls)	One package (rolls)	Gold, silver
12×30	10	240	
15×30	10	120	
18×30	10	120	
24×30	10	120	

Light packaging	Sealing	Decorating
-----------------	---------	------------

# Fixlon Tape No. 816

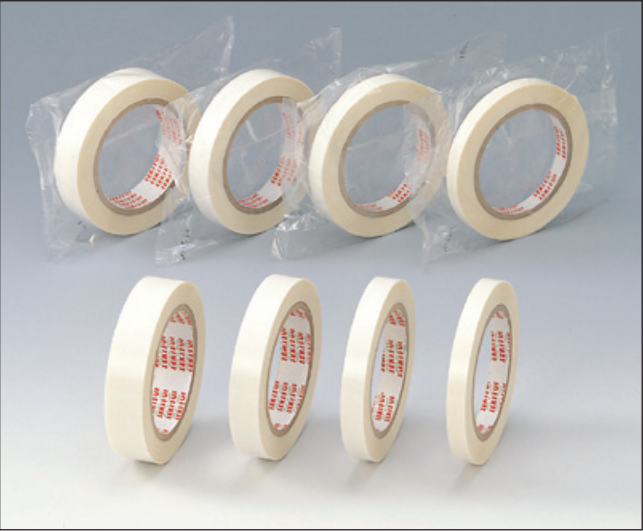

**Tape with special film that rarely leaves adhesive residue. Used for fixing and bundling.**  
Even after long exposure to heat and light there is little adhesive residue. Because of the self-adhesive's strength, it also sticks to embossed surfaces. Because a special film is used, it has the same strong, stretch-ability as filament tape.

- Usage
- Attaching the electrical components and electrical parts of refrigerators, ventilator fans, etc.
  - Fixing the parts of office machines, correspondence machines, etc.
  - Fixing and bundling furniture and instruments.

Performance		
Test items	Unit	Bag Sealer Tape C Type
Thickness of tape	mm	0.085
Thickness of base material	mm	0.06
Adhesive strength	N/10 mm (g/10 mm)	3.92 (400)
Tack	Ball No.	15
Unwinding force	N/10 mm (g/10 mm)	1.08 (110)
Tensile strength	N/10 mm (kg/10 mm)	220 (22.4)
Elongation	%	24
Adhesive strength of embossed face	N/10 mm (g/10 mm)	2.63 (263)
10% Modulus	N/10 mm (kg/10 mm)	87.7 (8.95)
Heat resistance	Acrylic coated board	—
	PP resin board	—
	ABS resin board	—
Resistance to climatic conditions	Acrylic coated board	—
	PP resin board	—
	ABS resin board	—

1) Measurement conditions/23℃, 65%RH  
2) Heat resistance/60℃x5days  
3) Resistance to climatic conditions/ Ultraviolet rays carbon arcx72hr  
\* The figures in the table above are measurements and are not guaranteed values.

Specifications			Base color
Size W (mm)× L (m)	Unit packaging (rolls)	One package (rolls)	White
12×50	1	120	
15×50	1	80	
19×50	1	60	
25×50	1	60	


Bundling	Temporary fixing
----------	------------------




## Method of Choosing Tape

Please refer to the points below when choosing a suitable tape for your adhesive needs.


**1** Do you want a permanent adhesive, a one time adhesive, or a removable one?  
● Choose an adhesive to meet your needs.

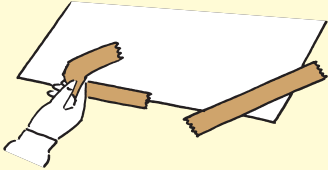


**2** How much and what kind of strength must the tape have, and how long must it hold?  
● Match it with your elasticity needs.

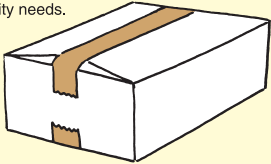


**3** Investigate the production environment (application by hand/machine, production area, production time, production employees)!  
● Choose tape that will make your packaging go smoothly.




**4** What are your shipping conditions (shipping method, storage conditions, package opening method, etc.)?  
● Choose a product to meet your environmental needs.



**5** What are the environmental conditions (inside/outside, temperature, humidity, solvent, medicine, etc.)?  
● Choose tape that makes opening packages easy upon arrival at their destination.



**6** What other functions do you need (protection, masking, indication, etc.)?  
● Match each use and aim

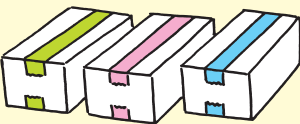


### Cautions for Use

- Packaging tape is for sealing cardboard boxes, home delivery, light wrapping, and other packaging uses. It is not to be used for anything else.
- Do not adhere it to the body.
- Do not use it for electrical insulation.
- Adhere it after wiping the adhesive surface well, so it is free of dust and oil.
- Press down hard when adhering it.
- It is best to store the rolls on their sides in low temperature and low humidity places.
- Be sure to check each product's "Cautions for Use" before use.


## Tape Capacity Indicators

**Tape capacity indicators are an estimate of the conditions of the tested products. Please use this as a reference for the purposes and the conditions of your applications.**

**● Tape's Thickness /Base Material's Thickness**  
The tape's thickness is the thickness of the base material and the self-adhesive.  
In product comparisons, the thicker products have stronger stretchability.

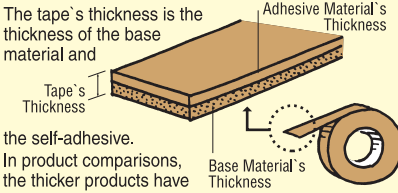


**● Adhesive Strength**  
When the tape is adhered to stainless steel and it is pulled back at a 180 degree angle, the peeling strength is measured. When the figure is big, the adhesive strength is strong.

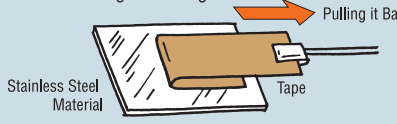


(The catalogue shows the figures measured at 180 degrees.)


**● Tensile Strength**  
This is a measurement of the pulling strength needed to tear the tape. When the figure is big, the strength of the film's base is strong.

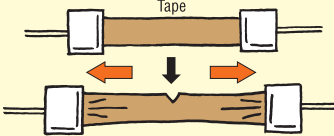


**● Extension/Stretching**  
This evaluates the tape's capacity to adjust to rounded surfaces when its length is stretched. The figure is indicated as a %. For example, in the case of 150%, 1 m. of tape extends to 1.5 m.

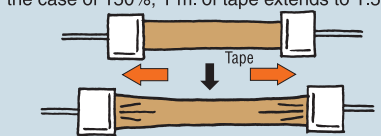


**● Tack**  
This tests the strength of the self-adhesive when weight is added. Steel balls, ranging from 1/32 - 2 inches in size, are rolled down a ramp placed at a 30 degree angle. The biggest steel ball to stop indicates the tape's adhesive strength.

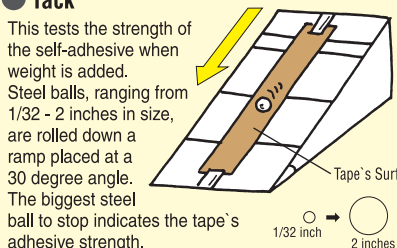

**● Unwinding Strength**  
When the tape is unwound for 1 minute at a speed of 60 m., the pulling load is shown. The lower the figures, the easier the tape is to unwind.



**● Holding Strength**  
The tape is adhered to stainless steel material and a weight is hung from it. After 2 hours, the tape's change in position is measured. The smaller the figures, the stronger the tape resists change in position, and it can really seal cardboard boxes.

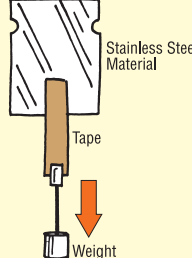

■ The capacities indicated in our catalogue are based on international standards (SI). The figures in ( ) indicate the capacities up until now.


■ The measurements are based on these measuring methods and experiments performed on JISZ0237 adhesive tape.

## Key points of order for printing tape

- Manuscripts to be printed
  - Basically, create the manuscript as a "camera ready copy".
  - Sketch orders (designated paper for printing) cost an additional charge for the camera ready copy.
  - \* In some cases we are unable to accept orders due to the design.


### Design pitch and effective size

- Be aware that the blank space between the end of the (transverse) effective size of the design and the tape edge, the pitch as a summation of the (longitudinal) design size and the space to the next design will differ from product to product.

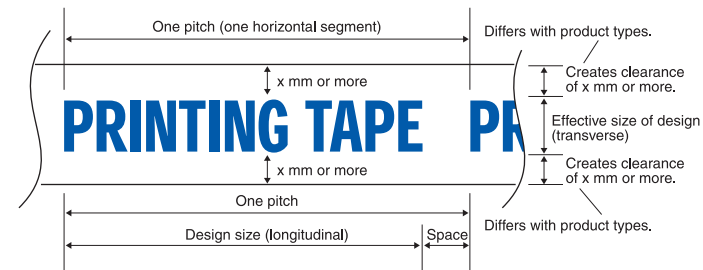


### Endless design

- For the products to which an endless design can be applied, designate the following items:

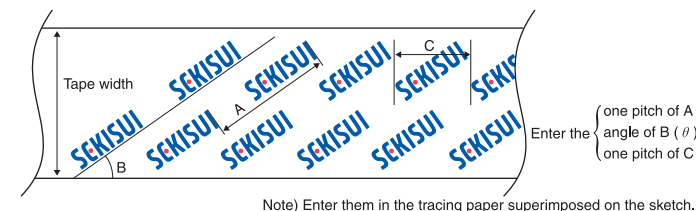

### Winding direction of the tape

- Ensure to designate the printing direction of the tape, as it varies according to its use.

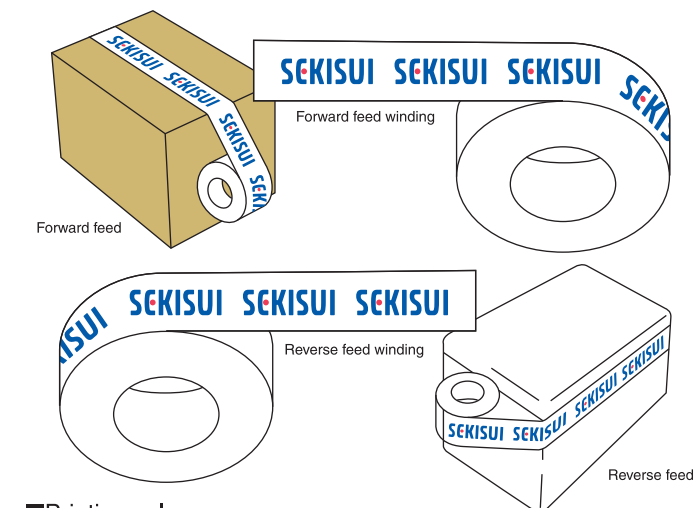

### Printing color

- Order the designated printing color for each product.
- If a printing color is combined with a solid printing color, the tint is a little different from that of a simple color.
- Be aware that the actual color may be different from that of the color card depending on the color of the base material.

### Printing type

- There are four printing types as follows:

Type A	Letterpress printing (letter printing)
Type B	Intaglio printing (white letters on a colored background)
Type C	Letterpress printing (solid printing + letter printing)
Type D	Intaglio printing (solid printing + white letters on a colored background)

### Printing plate

- You will be charged for the actual expenditure for the creation of a printing plate, except in the case of cellophane tape.
- If there is no repeated order during the storage period of the printing plate (12 months), the printing plate will be disposed of. Plates for printing cellophane tape will be disposed of after six months. If a repeated order is accepted after the plate has been disposed of, it is treated as a new order.

### Order and delivery quantity

- Delivery quantity shall be the number produced.
- The delivery quantity will have fluctuations of around 15 percent of the order quantity.
- Please confirm the order quantity separately.

## Cellophan Tape for Printing



Effective size of design (transverse)	Blank space from the tape edge Upper: 3 mm or more Lower: 3 mm or more
Endless design	Possible
Printing type	Type A, Type B, Type C and Type D

### Pitch of design

24mm / 25mm / 26mm / 28mm / 29mm / 30mm / 31mm / 33mm / 34mm / 35mm / 36mm / 37mm / 39mm / 42mm / 43mm / 45mm / 47mm / 49mm / 52mm / 54mm / 59mm / 66mm / 67mm / 74mm / 78mm / 84mm / 94mm / 98mm / 118mm / 148mm / 157mm / 197mm / 235mm / 295mm / 470mm / 590mm

### Printing-capable tape

SEKISUI Cellophane Tape No.252

- For other conditions, please contact us.

## Kraft Tape for Printing



Effective size of design (transverse)	Blank space from the tape edge Upper: 7 mm or more Lower: 7 mm or more
Endless design	Possible
Printing color	Separate consultation
Printing type	Type A, Type B, Type C and Type D

### Pitch of design

50mm / 56mm / 60mm / 70mm / 75mm / 80mm / 100mm / 120mm / 125mm / 140mm / 150mm / 200mm / 250mm / 280mm / 300mm / 500mm / 560mm / 600mm

### Printing-capable tape

Kraft Tape No. 500 / White Kraft Tape No. 500W / Super Kraft Tape No. 504NS / White Super Kraft Tape No. 504WNS (Only 38mm and 50 mm-wide)

- For other conditions, please contact us.

## OPP Tape for Printing



Effective size of design (transverse)	Blank space from the tape edge Upper: 7 mm or more Lower: 7 mm or more
Endless design	Possible
Printing color	Separate consultation
Printing type	Type A, Type B, Type C and Type D

### Pitch of design

50mm / 56mm / 60mm / 70mm / 75mm / 80mm / 100mm / 120mm / 125mm / 140mm / 150mm / 200mm / 250mm / 280mm / 300mm / 500mm / 560mm / 600mm

### Printing-capable tape

OrienTape No. 830 / Tough Light Tape No. 835

- For other conditions, please contact us.



## **SEKISUI CHEMICAL CO.,LTD.**

**High Performance Plastics Company**

### **FUNCTIONAL TAPE DIVISION**

The Okura Prestige Tower 10-4  
Toranomom 2-chome, Minato-ku Tokyo  
105-8566 JAPAN  
TEL:03-6748-6447(+81)

### **SEKISUI PRODUCTS, LLC.**

50 W. Big Beaver Road ,Suite 145, Troy MI 48084, U.S.A.  
TEL: (1-)248-307-0000 FAX: (1-)248-307-1680

### **SEKISUI CHEMICAL (TAIWAN) CO., LTD.**

Room A. 10F, No.2 SEC.2, Nanjing East Rd.,  
Taipei 104, Taiwan, R.O.C.  
TEL: 02-2523-5335(+886) FAX: 02-2523-5336(+886)

### **SEKISUI (SHANGHAI) INTERNATIONAL TRADING CO., LTD**

Room 706 Metro Tower,  
No.30, Tian Yao Qiao Road, Shanghai China 200030  
TEL: 021-64820638(+86) FAX: 021-64820639(+86)

#### **Beijing office**

Rm2303A, Kuntai International Mansion Building, Yi  
No.12 Chao Wai Street, Chao Yang District, Beijing  
CHINA 100020  
TEL: 010-5879-7880 FAX: 010-5879-7885

#### **Shenzhen office**

Room 2911-15, 29/F. Office Tower, Shun Hing Square,  
Di Wang Commercial Centre, 5002 Shen Nan Dong  
Road, Shenzhen, CHINA  
TEL: (86-)755-82219393 FAX: (86-)755-82219395

### **SEKISUI (HONG KONG) LTD. HEAD OFFICE**

#### **HEAD OFFICE - Hong Kong Office**

8th Floor, 111 Leighton Road, Causeway Bay  
HONG KONG  
TEL: 2890-9161(+852) FAX: 2577-1908(+852)

### **SEKISUI SINGAPORE PTE,LTD.**

7500A Beach Road. #12-304/307 The Plaza. Singapore  
199591  
TEL:65-629-637-88 FAX:65-629-677-23

### **SEKISUI SPECIALTY CHEMICALS(THAILAND) CO.,LTD.**

968 12th Floor, U-Chuliang Building,  
Rama 4 Road, Silom, Bangrak, Bangkok 10500, Thailand  
TEL: +66-2237-7933 FAX: +66-2632-4577

### **SEKISUI KOREA CO.,LTD.**

16F Sanhak foundation Bldg., Secho-dong, 329  
Gangnam-daero, Seocho-u, Seoul, 06627, Korea  
TEL: +82-2-319-9471 FAX: +82-2-319-9475

### **SEKISUI CHEMICAL G.m.b.H.**

#### **HEAD OFFICE**

Konigsallee 106, Dusseldorf, Germany  
40215  
TEL: 0211-36977-0 FAX: 0211-36977-31(+49)

**HP Address**

**<http://www.tutuminet.com>**

- We welcome any inquiries concerning the descriptions contained in this technical data.
- Any statements contained in this technical data are for reference purposes only and represent no guarantees for users.
- The contents of this catalogue are subject to change without prior notice.