


Product : Single Faced Tape #735A

SEKISUI #735A is a single faced tape composed of a polyethylene cloth and a toluene-free acrylic adhesive. It can be easily cut by hand and contribute to improve workability. It also has excellent adhesion to olefin adherends. Yellow color base material gives high visibility and can reduce work mistakes.

Structure

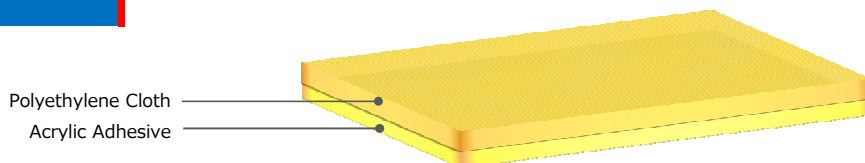

Applications

- 1) For fixing wire harness in the vehicle
- 2) For fixing industrial parts in the vehicle

Features

- (1) Since it has excellent adhesion to olefin material such as PP, it can be used for various applications.
- (2) It uses an acrylic non-toluene adhesive with excellent durability and weatherability.
- (3) It is free from the thirteen chemical substances regulated by the ministry of Health, Labour and Welfare in Japan, which are harmful to human bodies.

*1 Formaldehyde, toluene, xylene, chlorpyrifos, p-dichlorobenzene, ethylbenzene, styrene, dibutyl, phthalate, diethylnhexyl phthalate, tetradecane, diazinon, acetaldehyde, tenobucarb

Standard Size

Property	Unit	#735A
Tape Thickness	mm	0.170
Standard Size (Width)	mm	20
Standard Size (Length)	M	50

※Please contact us for other available sizes.

Properties

Property			Unit	#735A	Method
180 degree Peeling Adhesion	SUS	23℃	N/25mm	24.7	Based on JIS Z 0237 (Old Version) Pressure: 2kg roller Peeling Speed: 300mm/min
	PP			20.3	
Holding Power	JIS Holding Power		mm	0.3	40℃ / 1kg X 1hr

Precautions

- 1) Please remove dirt, water, oil and other contaminants from the substrates' surface before use.
- 2) Please avoid re-application, and leave it for several hours after applying it.
- 3) Please avoid direct application on uneven or rough surfaces and body parts.
- 4) Please avoid storage in places with high temperatures, high humidity, and direct sunlight.
- 5) Please test it out on the surface first. If you have question about its use, please contact us.

※ The figures above are measured values and are not guaranteed values.

The spec and appearance may be changed without notice. Customers are responsible for judging if the tape can be used for their application.

SEKISUI CHEMICAL CO., LTD.

High Performance Plastics Company
Functional Tape Division

Address;

2-10-4 Toranomom, Minato-ku, Tokyo 105-8566 JAPAN
TEL: +81-3-6748-6447 FAX: +81-3-6748-6538