


Product :Double Faced Tape #518TF

SEKISUI #518TF is a black polyethylene foam based double sided tape that has been developed by our own technology. Its acrylic adhesive has excellent adhesion and holding power.

Structure

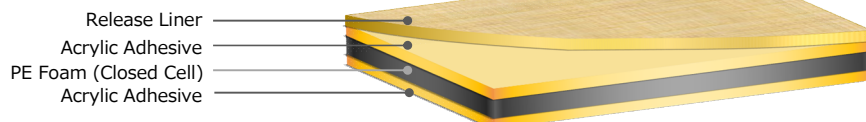

Applications

- 1) For fixing industrial parts

Features

- (1) Black special polyethylene foam (closed cells) is used.
- (2) It has excellent adhesion to rough surface.

Standard Size

Property	Unit	#518TF
Tape Thickness	mm	1.3
Standard Size (Width)	mm	970
Standard Size (Length)	M	30

※Please contact us for other available sizes.

Properties

Property			Unit	#518TF	Method
90 degree Peeling Adhesion	SUS	23℃	N/25mm	35.9	Based on JIS Z 0237 (Old Version)
	PC			39.1	Pressure: 2kg roller Peeling Speed: 300mm/min
Holding Power	JIS Holding Power		mm	0.8	80℃ / 0.5kg X 1hr

Precautions

- 1) Please remove dirt, water, oil and other contaminants from the substrates' surface before use.
 - 2) Please avoid re-application, and leave it for several hours after applying it.
 - 3) Please avoid direct application on uneven or rough surfaces and body parts.
 - 4) Please avoid storage in places with high temperatures, high humidity, and direct sunlight.
 - 5) Please test it out on the surface first. If you have question about its use, please contact us.
- ※ The figures above are measured values and are not guaranteed values.

The spec and appearance may be changed without notice. Customers are responsible for judging if the tape can be used for their application.

SEKISUI CHEMICAL CO., LTD.

High Performance Plastics Company
Functional Tape Division

Address;

2-10-4 Toranomom, Minato-ku, Tokyo 105-8566 JAPAN
TEL: +81-3-6748-6447 FAX: +81-3-6748-6538